



AF series

Accessories for CF optical fibres



Accessories for CF
optical fibres

features

- Wide range of collimator lenses
- IP67 protection degree
- SSF – FS1 – FX3 – FX4 series connectable
- 90° optic deviator accessory
- Accessory adapter for fibre diameter from 1 to 2 mm
- Approvals: CE

web contents


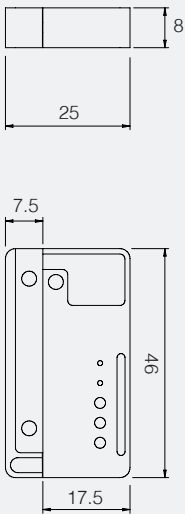


- Application notes
- Photos
- Catalogue / Manuals


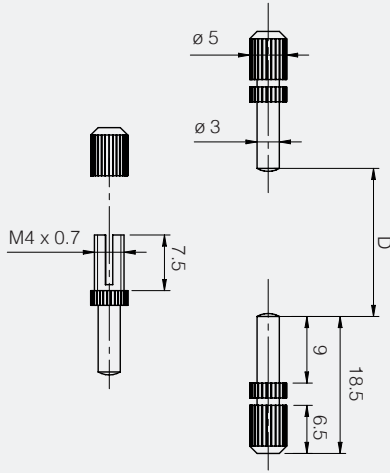



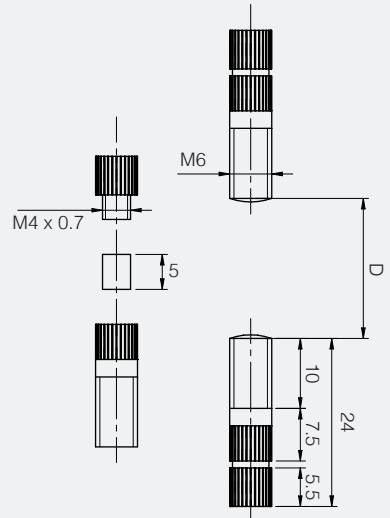
ordering system

models	accessory type	type	SSF (EX.G.=1)	FS1 (EX.G.=1)	FX3 (EX.G.=1)	FX4 (EX.G.=1)	F1R	F2R	F6R	lenses	fibre model	Ø optical fibre core
AF/C	cutter											1
AF/1S	fibre to sell by metres											
AF/ER4	collimator lenses	P/R	600 mm	600 mm	2,000 mm	3,000 mm	1,500 mm	700 mm	3,000 mm	●	AF/1S	
AF/ER5			1,000 mm	1,000 mm	3,000 mm	5,000 mm	2,200 mm	1,000 mm	4,500 mm			
AF/ER6			3,500 mm	3,500 mm	6,000 mm	8,000 mm	4,500 mm	2,000 mm	6,000 mm			
AF/ER7			1,000 mm	1,000 mm								

cutter model AF/C		
product	main features	dimensions (mm)
	<p>Ø optical fibre core 1 mm (plastic)</p> <p>NOTE: Before inserting the optical fibre into the fibre-head, cut it using the supplied cutter. In order to obtain the best performances the accuracy of fibre-cutting is fundamental.</p>	

optical fibre AF/1S model		
product	main features	dimensions (mm)
	<p>Ø optical fibre core 1 mm</p> <p>Ø optical fibre 2.2 mm (plastico)</p> <p>optical fibre single - sold by the meter</p>	


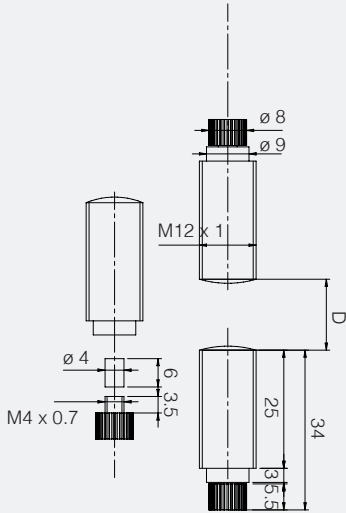
collimator lenses AF/ER4 model		
product	main features	dimensions (mm)
	optical fibre code	AF/1S
	Ø optical fibre core	2.2 mm (plastic)
	distance (with SSF)	600 mm
	distance (with FS1)	600 mm
	distance (with FX3)	2,000 mm
	distance (with FX4)	3,000 mm
	distance (with F1R)	1,500 mm
	distance (with F2R)	700 mm
	distance (with F6R)	3,000 mm
	protection degree	IP67 (EN60529)
	temperature range	-40°C....+70°C
	materials	glass, ETM, nickel plated brass
		

collimator lenses AF/ER5 model		
product	main features	dimensions (mm)
	optical fibre code	AF/1S
	Ø optical fibre core	2.2 mm (plastic)
	distance (with SSF)	1,000 mm
	distance (with FS1)	1,000 mm
	distance (with FX3)	3,000 mm
	distance (with FX4)	5,000 mm
	distance (with F1R)	2,200 mm
	distance (with F2R)	1,000 mm
	distance (with F6R)	4,500 mm
	protection degree	IP67 (EN60529)
	temperature range	-40°C....+70°C
	materials	glass, ETM, nickel plated brass
		


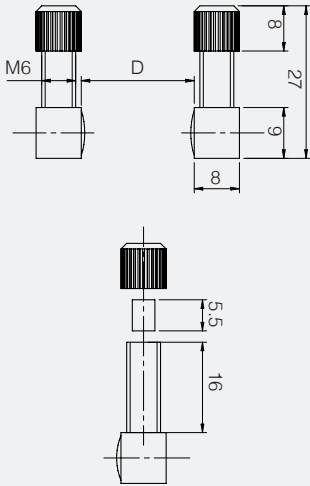





Accessories for CF
optical fibres


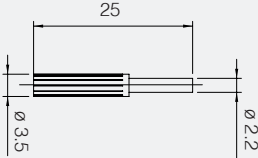
collimator lenses AF/ER6 model

product	main features	dimensions (mm)
	optical fibre code	AF/1S
	Ø optical fibre core	2.2 mm (plastic)
	distance (with SSF)	3,500 mm
	distance (with FS1)	3,500 mm
	distance (with FX3)	6,000 mm
	distance (with FX4)	8,000 mm
	distance (with F1R)	4,500 mm
	distance (with F2R)	2,000 mm
	distance (with F6R)	6,000 mm
	protection degree	IP67 (EN60529)
	temperature range	-40°C....+70°C
	materials	glass, ETM, nickel plated brass
		


collimator lenses AF/ER7 model

product	main features	dimensions (mm)
	optical fibre code	AF/1S
	Ø optical fibre core	2.2 mm (plastic)
	distance (with SSF)	1,000 mm
	distance (with FS1)	1,000 mm
	distance (with FX3)	6,000 mm
	distance (with FX4)	8,000 mm
	distance (with F1R)	4,500 mm
	distance (with F2R)	2,000 mm
	distance (with F6R)	6,000 mm
	protection degree	IP67 (EN60529)
	temperature range	-40°C....+70°C
	materials	glass, ETM, nickel plated brass
		

collimator lenses AF/ER9 model		
product	main features	dimensions (mm)
	<div>type</div> <div>P/R</div>	<div>  </div> <div>  </div>
	<div>accessory type</div> <div>90° optic deviator accessory</div>	
	<div>SSF (EG = 1)</div> <div>120 mm</div>	
	<div>FS1 (EG = 1)</div> <div>120 mm</div>	
	<div>FX3 (EG = 1)</div> <div>700 mm</div>	
	<div>FX4 (EG = 1)</div> <div>700 mm</div>	
	<div>F1R</div> <div>400 mm</div>	
	<div>F2R</div> <div>200 mm</div>	
	<div>F6R</div> <div>800 mm</div>	
	<div> <div>ø optical fibre core</div> <div>1</div> </div> <div> <div>fibre model</div> <div>CF/RB3-20</div> </div>	

collimator lenses AF/1A2 model		
product	main features	dimensions (mm)
	<div>type</div> <div>accessory adapter for fibre diameter from 1 to 2 mm</div>	<div>  </div>
	<div>fibre model</div> <div>all optical fibres models with ø 1 mm</div>	



collimator lenses ST28 model		
product	main features	dimensions (mm)
	type	P/R
	accessory type	right angle beam adapter
	SSF (EG =1)	700 mm
	FS1 (EG =1)	700 mm
	FX3 (EG =1)	4,200 mm
	FX4 (EG =1)	5,600 mm
	F1R	1,500 mm
	F2R	1,000 mm
	F6R	3,000 mm
	∅ optical fibre core	-
	fibre model	CF/RBA-** CF/RCA-20
		